

EASY-RAIN 5000L SHALLOW-DIG TANK

- Lightweight, easily handled
- Low installation cost
- Only 5cm height difference between inlet and overflow
- Available with or without integral filter
- Ideal for retrofit in existing gardens
- Can be installed in ground water up to tank shoulder
- Also available in shallower 1500L & 3000L sizes
- 20 year warranty



5000L tank complete with internal filter, trimmable access shaft and cover


Easy-Rain Flat Tank 5000 litres

A rotationally moulded polypropylene tank, designed to minimise the excavation work required, resulting in reduced installation cost and time, and less excavated material to dispose of.

The tank also has the advantage of requiring no concrete backfill.

The tank is available either as a bare tank or with an in-built Wisy® LineAr 440-micron filter with calmed inlet arrangement, and forms a perfect combination with our WRAS-Approved Sigma rainwater unit.

For details of LineAr filters see datasheet LF/18/01 For details of Sigma unit see datasheet RZ/15/01

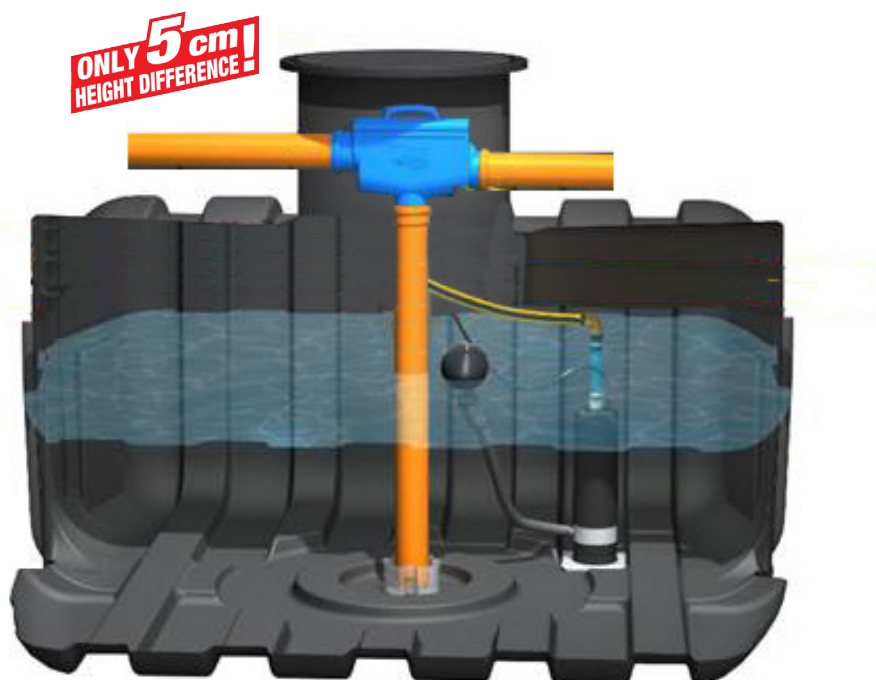

The LineAr filter unit can be fitted either in the turret or inside the tank itself



UK agent and distributor for Wisy AG



Products for rainwater utilisation



Flexible System Design

Our comprehensive range of specialist items has been developed specifically for Rainwater Harvesting Systems. Because the range consists of separate components, it has exceptional flexibility.

We supply equipment suitable for almost any system design, whether you're planning a system for a small house, school or large industrial or commercial premises.

EASY-RAIN SHALLOW-DIG TANKS

Tank is supplied with turret & access cover.

The turret is 70cm high, and can be easily cut down at top or bottom, depending on installation depth required.


The cover is secured with 3 retaining screws and has a load bearing capacity of 35kN.






Built-in LineAr 100K filter complete with calmed inlet diffuser. The filter element is of 1.4301 stainless steel and will never need replacing. When the tank is full excess water overflows through the filter outlet.




Calmed inlet diffuser prevents turbulence and avoids disturbance to float switches or sensors.

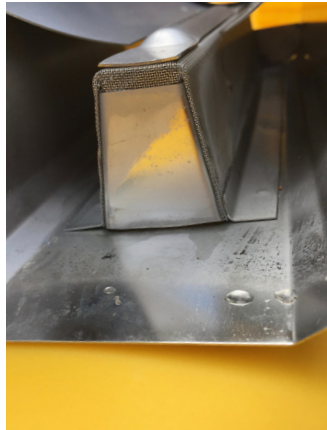

The mesh of the unique Wisy® LineAr filter provides a near vertical surface that exploits the adhesive nature of water.

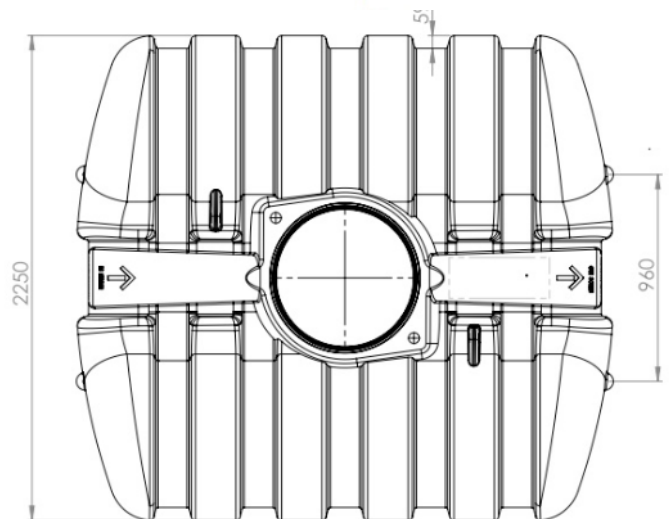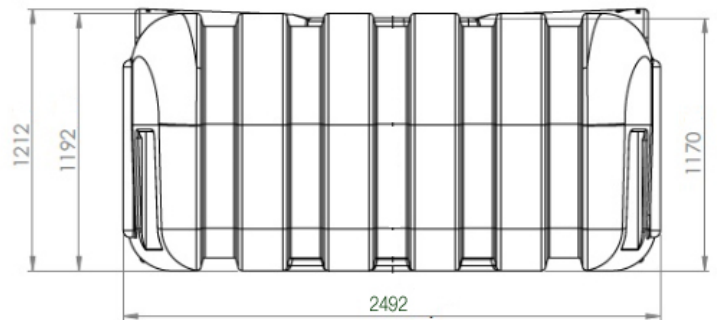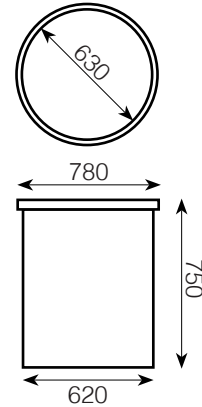

5000L tank dimensions.

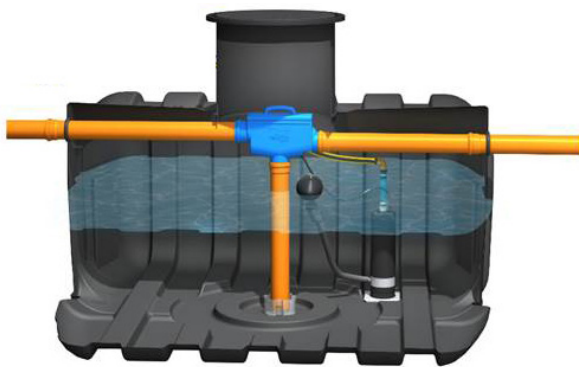

5000 litre flat tank with internal filter unit

Technical data:

Length	Width	Height (tank body)	Max height with 70cm shaft	Weight
2492mm	2250mm	1212mm	1912mm	200kg

Distributor:

Rainharvesting Systems Ltd.

Calf Way, Bisley, Stroud,
Gloucestershire GL6 7BX
Tel: 01452 772 000
e: sales@rainharvesting.co.uk
w: rainharvesting.co.uk

