


DUAL PUMP CONTROL PANEL

- Three models available at 0.55, 0.75 or - 1.1kw rating
- IP55 rated enclosure
- Door interlock main switch
- Volt-free contacts on alarm circuit
- Sensitivity and time delay adjustment for current protection circuit
- Sensitivity adjustment for level switches/probes (alarm) circuit
- Pump duty cycling
- Thermal circuit breakers with optional contacts for remote alarms
- Fuses for pump and auxillary circuit protection
- Enclosure drilled with six holes and supplied with cable glands
- Configuration links for: empty or fill switching (in alarm circuit), disable alarm, disable current protection



Control panels for the safe and reliable operation of single pumps. The robust ABS enclosure has an interlock switch on the cover, preventing the panel from being opened whilst the unit is switched on. Demand and dry-run protection switches can be wired in to give fully automatic pump operation. The volt-free contacts can be used to provide a BMS signal.

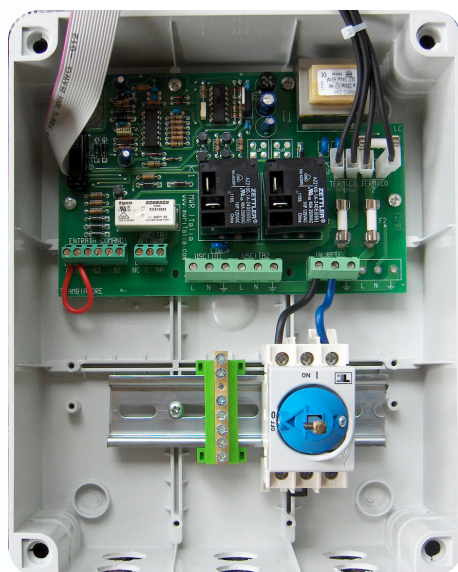

Panel internals with terminal block and DIN rail

Single pump control panels and variable speed controllers are also available.

Dimensions:
250mm high x 200mm wide x 130mm deep



RAINHARVESTING SYSTEMS



Commercial Rainwater Harvesting

- Schools
- Offices
- Industrial
- Agriculture
- Horticulture
- Vehicle wash

Flexible System Design

Our comprehensive RainTech® range of specialist products has been developed specifically for use in Rainwater Harvesting Systems. Because the range consists of separate components, it has exceptional flexibility.

This enables us to design a system for almost any application. With years of experience and our in-depth product knowledge, we can provide the right solution to suit your requirements.



We are the UK's sole supplier of Wisy® products for rainwater utilisation



RAINHARVESTING SYSTEMS Ltd. Bisley, Glos. 01452 772000
www.rainharvesting.co.uk

Data Sheet CP/16/02